


Fig\_2

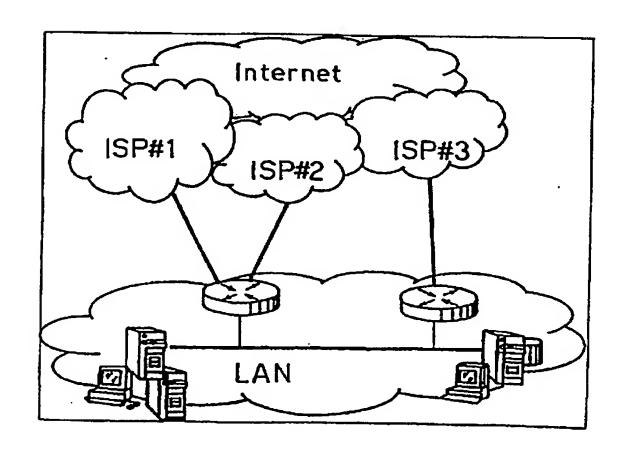

BEST AVAILABLE COPY

## F<u>io</u>\_3



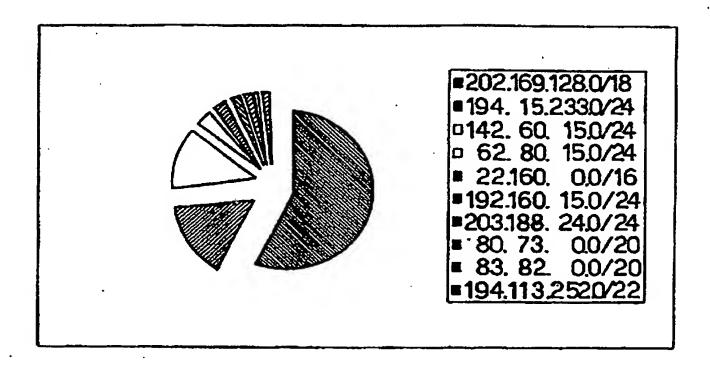


Fig. 4




**BEST AVAILABLE COPY** 

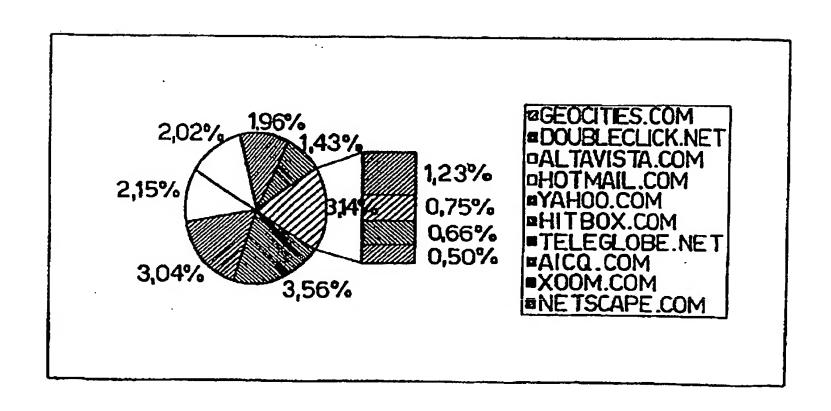

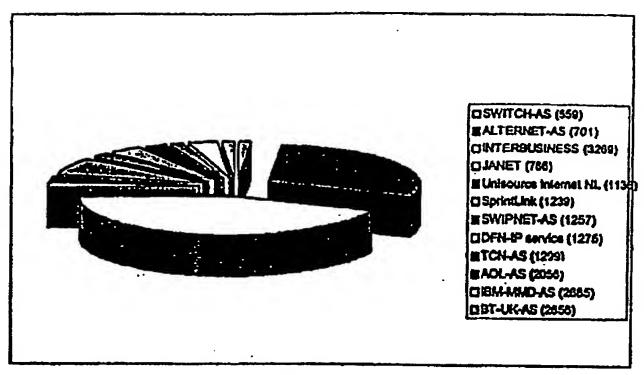


Fig\_6

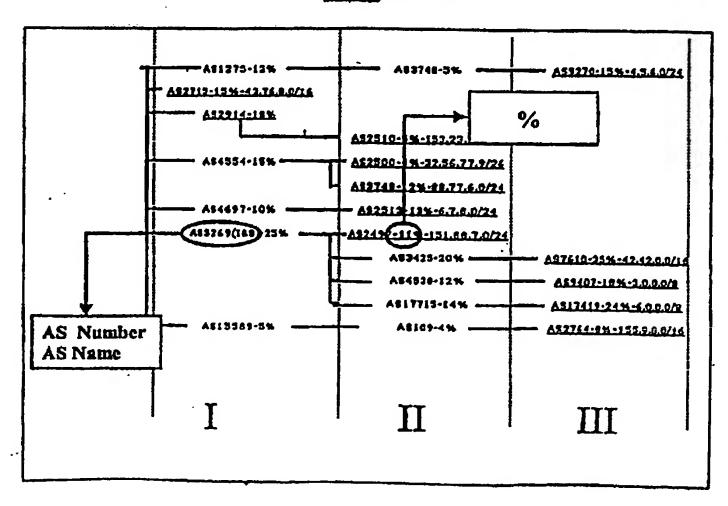

**BEST AVAILABLE COPY** 

AS	MSEC	SALTI (HOP)
AS5647	33msec	4
AS 4536	128msec	5
AS 4832	45msec	12
AS 2421	63msec	6

F<u>i</u>0-8

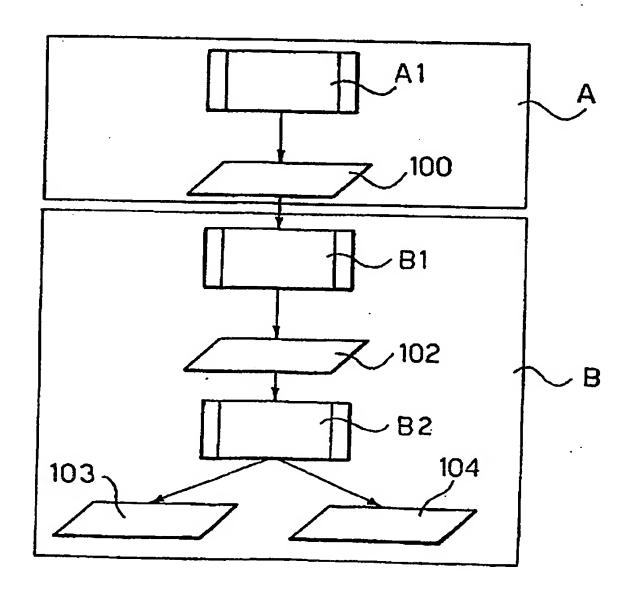

BEST AVAILABLE COPY

Fig. 9

## C:/ traceroute www.cisco.com traceroute to www.cisco.com (198.133.219.25), 30 hops max, 20 byte packets

1 163.162.4.165 (163.162.4.165) 2 ms 1 ms 2 163.162.4.158 (163.162.4.158) 1 ms 1 ms 3 163.162.46.130 (163.162.46.130) 1 ms 1 ms 1 ms 4 radware-FP1.cselt.lt (163.162.41.99) 5 ms 3 ms 4 ms 5 172.16.251.4 (172.16.251.4) 4 ms \* 172.16.251.3 (172.16.251.3) 6 radware-FP1.cselt.lt (163.162.41.99) 7 202.152.45.20 (202.152.45.20) 11 ms 10 ms 10 ms 3 ms 2 ms

BEST AVAILABLE COPY